
FIRELITE TRANSPORT FCUHP-402-160

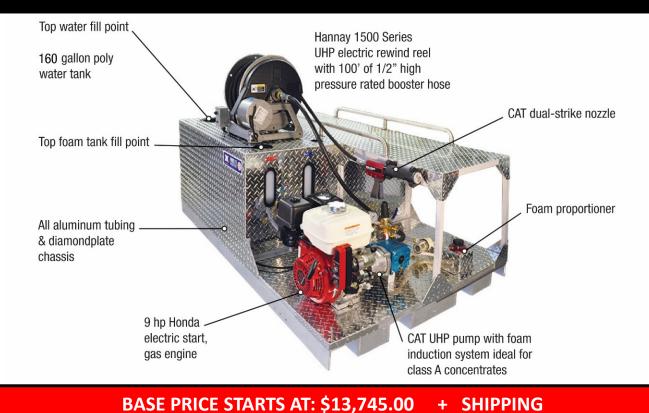

All of these standard features included in base price above

- 160 gallon poly water tank with integrated 5 gallon foam cell
- CAT UHP pump with foam induction system ideal for Class A concentrates
- CAT Dual-strike UHP nozzle that delivers water or foam solution
- Injection percentage from 0.5% to 6.0%
- 9 HP Honda gas engine with electric start
- 1500 series UHP Hannay Electric Rewind Reel
- 100' of ½" high pressure rated booster hose with UHP nozzle
- Pressure gauge
- Inlet filter
- Primary and secondary pressure relief
- Purging system

Dimensions	Dry Weight	Wet Weight + foam	Crated Weight
160 Gallon 48"W x 76"L x 45"H	745	2065	1000

*weights & dimensions are approximate only

CAT triplex, gearbox driven high-

pressure pump GPM/PSI

PSI

1200

GPM

6.7



ALL UNITS SHIP FULLY ASSEMBLED







SHIPPING







